REV	DESCRIPTION\PER REQUEST	DRAWN	DATE

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

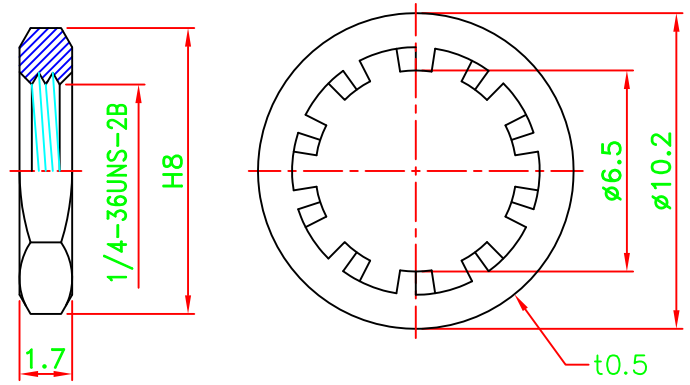



RECOMMENDED
MOUNTING HOLE



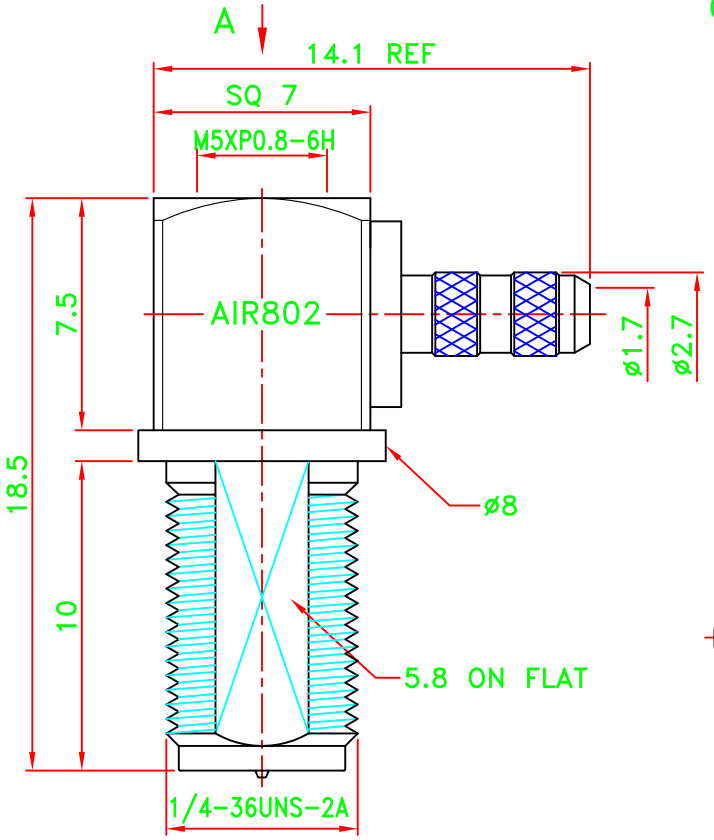

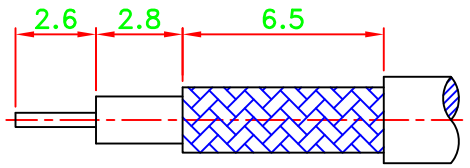

RECOMMENDED
CABLE STRIPPING DIM'S

CRIMP SIZES REQUIRED
CONTACT: SOLDER
FERRULE: .128(3.9mm)

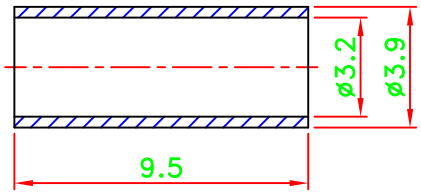

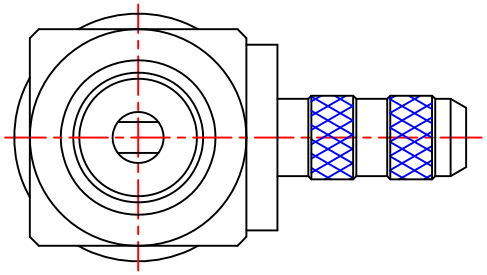

A VIEW

NO	Description	Q'ty	Material	Finish
8	Nut	1	Brass	Gold
7	Washer	1	Brass	Gold
6	Screw	1	Brass	Gold
5	Ferrule	1	Brass	Gold
4	Press fit ferrule stud	1	Brass	Gold
3	Dielectric	1	Teflon	None
2	Pin	1	Brass	Gold
1	Body	1	Brass	Gold

70C00R300-000

STAMP:AIR802

PART NO.	CN1RSJBRA		
APPROVED	M. Bryant	DATE	04/27/12
CHECKED		DATE	04/27/12
DRAWN	Kai	DATE	04/27/12

* MAJOR DIMENSION
UNLESS OTHERWISE NOTED TOLERANCES
0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
ANGLES=±1°

SCALE 4/1 UNIT mm

AIR802 LLC

TITLE
SMA R/A R/P BULKHEAD CRIMP JACK

DRAWING NO. ASSMA-10408-L-RP-TGG REV A

FILE NO.W:\?~\AS\ASSMA\ASSMA-10408-L-RP-TGG AIR802 -> 20120430